


VARIO LINE KIT FOR FDS

includes 4 pigtails & 8 steel rings



You only need six of the rings to mount the kit.



1. Connect all four pigtails at the highlighted spots on your control bar.



2. Connect the pigtails to the control bar with a larks head, as shown in the pictures above.



3. Disconnect all back- and front lines from the kite. Pull each line through the small ring and one steel ring from the kit. Connect each line to the larger steel ring with a larks head knot.



FLYSURFER
KITEBOARDING





VARIO LINE KIT FOR FDS


includes 4 pigtails & 8 steel rings



4. Disconnect the white reef line at the Y-bridle. Place one ring from the kit over the two lines coming from the kite and fix them using a larks head knot.

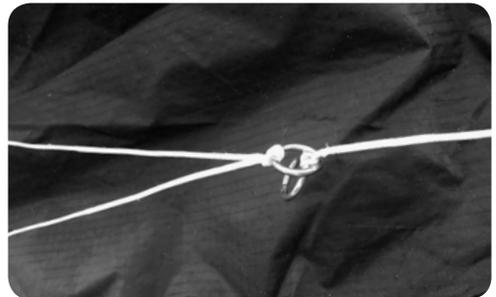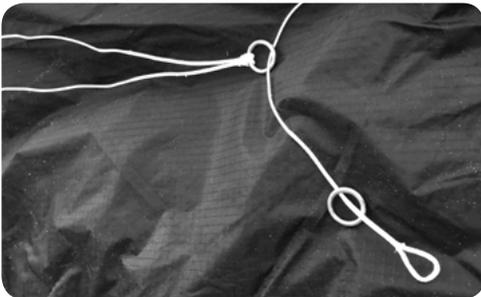

5. Pull the reef line through the first ring and then through a second steel ring from the kit. Connect the reef line with a larks head knot to the second steel ring.

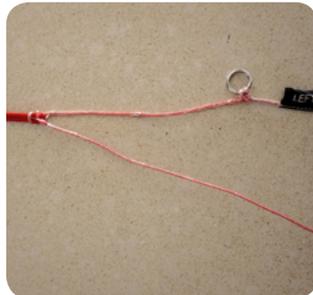

6. To shorten the flying lines, take all new steel rings and walk them back towards the bar. Use the pigtails to connect the steel rings to the control bar. Fix them using a larks head knot.